
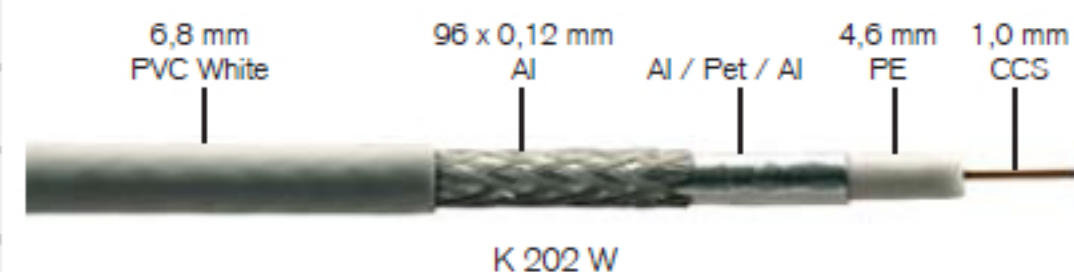


Coaxial cables RG-6

Reference	(1) K 200 E (2) K 200-3E	(1) K 202 B (2) K 202 W (3) K 202 W3
Code	(1) 0703121 (2) 0703121-3	(1) 0703404 (2) 0703402 (3) 0703406
Inner Conductor (mm) ø	1,0 CCS	1,0 CCS
Dielectric Diameter (mm) ø	4,6	4,6
Foil	Al/ Pet	Al / Pet / Al
Braid	Al	Al
N° of wires (braiding)	48	96
Screening Factor (dB) (30-900 MHz)	>70	>85
Outer Sheath	PVC White	(1) PE black (2) PVC White (3) PVC White
External Diameter (mm)	6,8	6,8
Attenuations (dB/100 m)		
47 MHz	4,8	4,8
175 MHz	8,3	8,3
470 MHz	13,5	13,5
862 MHz	18,8	18,8
950 MHz	19,9	19,9
1350 MHz	24,0	24,0
1750 MHz	27,5	27,5
2150 MHz	30,9	30,9
Presentation	(1) 100 m / Cardboard Box (2) 300 m / Wooden Drum	(1) 100 m / Cardboard Reel (2) 100 m / Cardboard Reel (3) 300 m / Wooden Drum
Packaging	(1) 4/144 (2) 1/27	(1) 4/168 (2) 4/168 (3) 1/27

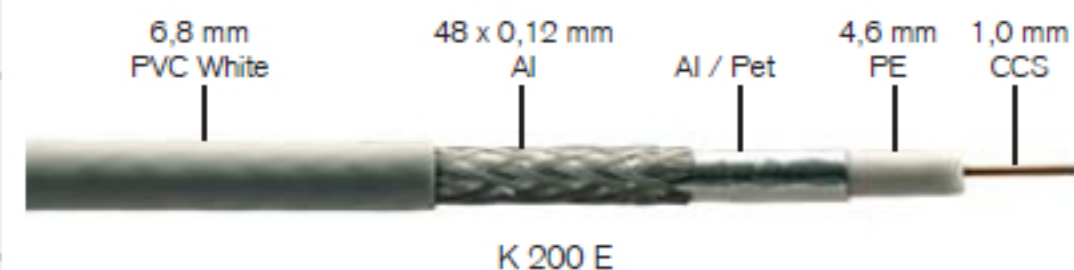

Reel K 200 E